

12

**EUROPEAN PATENT APPLICATION**

21 Application number: 85301740.8

51 Int. Cl.<sup>4</sup>: D 06 N 7/00

32 Date of filing: 13.03.85

30 Priority: 27.06.84 US 625224

43 Date of publication of application:  
29.01.86 Bulletin 85/5

84 Designated Contracting States:  
AT BE CH DE FR GB IT LI LU NL SE

71 Applicant: COLLINS & AIKMAN CORPORATION  
210 Madison Avenue  
New York New York 10016(US)

72 Inventor: Peoples, Clarence Asbury Jr.  
Route 2 Box 46F  
Rockwell North Carolina 28138(US)

72 Inventor: Hicks, Jacquelyn Shaeffer  
804 North Tibbs Road, No 38  
Dalton Georgia 30720(US)

72 Inventor: Smith, Vernon Curtiss  
Route 4, Box 916  
Huntersville North Carolina 28078(US)


74 Representative: Szczuka, Jan Tymoteusz et al,  
Cruikshank & Fairweather 19 Royal Exchange Square  
Glasgow G1 3AE Scotland(GB)

54 Molded foam-backed carpet assembly and method of producing same.

57 The present invention provides a moulded carpet assembly 10 suitable for use in an automobile having foam backing only in localized preselected areas of the carpet assembly 10 to reduce weight, provide better fit and conformity while providing the desired padding, cushioning and sound deadening where most needed. The carpet assembly has a predetermined nonplanar three dimensional contoured configuration for conforming to the predetermined contours of the floor of said automobile; a mouldable thermoplastic polymer layer 24 covering the carpet backing 22 and imparting mouldability to the carpet 10 for maintaining said configuration; and at least one foam pad 15a,b,c carried by said thermoplastic polymer layer 24 and bonded thereto, said pad 15a,b,c extending over less than the entire surface of said thermoplastic polymer layer 24 and providing desired cushioning and sound and thermal insulation only in preselected areas of the carpet 10.

The invention also provides a method of producing a carpet assembly for use in an automobile which comprises applying a layer 24 of a mouldable thermoplastic polymer to the carpet backing 22 of a carpet 10, heating the carpet 10 to soften the thermoplastic layer 24 and moulding the carpet 10 into a predetermined nonplanar three dimensional contoured configuration; and forming in situ on the exposed surface of the thermoplastic layer 24 at least one foam pad

15a,b,c bonded to the thermoplastic layer 24 and covering selected areas only of the carpet 10.

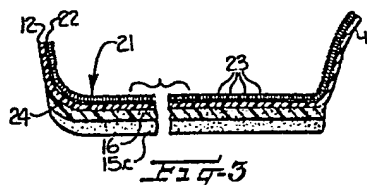

EP 0 169 627 A2

MOULDED FOAM-BACKED CARPET ASSEMBLY  
AND METHOD OF PRODUCING SAME

This invention relates to a moulded carpet assembly suitable for use for example in automobiles, and to a method of producing such a carpet assembly.

5 The carpeting used to cover the floor areas of automobiles is conventionally moulded into a nonplanar three dimensional contoured configuration which conforms to the contours of the automobile floor so as to fit properly, for example, over the transmission hump on the floor of the automobile. In order to make the carpeting 10 mouldable and shape sustaining, it is conventionally provided with a backing or coating of a thermoplastic polymer composition. The thermoplastic polymer backing may contain substantial amounts of inorganic fillers to improve the sound deadening properties. Additionally, 15 automotive carpets are normally provided with padding on the rear surface for cushioning, sound deadening, and thermal insulation. The pads are commonly formed from relatively inexpensive fibres such as jute or recycled waste fibres, and they are precut into predetermined 20 desired shapes and bonded to the back-coated surface of the moulded carpet. Formerly, the padding was used over the entire rear surface of the carpet, as shown for example in Squier U.S. Patent 3,673,034. More recently, in an effort to reduce weight and cost and to achieve 25 better conformity to the irregular contours of the automobile interiors, the pads have been applied only in selected areas of the carpet where the cushioning, sound deadening and thermal insulation are most needed. Depending upon the particular automobile body style, the 30 moulded carpet may require one or several pads, often of varying thickness, at different locations on the back of the moulded carpet.

In the production of this type of moulded carpet assembly, a number of difficulties are encountered. The pads often vary in size and thickness, which results in nonuniformity of the resulting product. This construction  
5 requires manual placement and assembly of the pads which, in addition to the labour costs involved, often results in variations in placement of the pads on the carpet backing, which further contributes to a nonuniform product and results in a poor fit when the carpet assembly is later  
10 installed in the automobile. Difficulties are also encountered in obtaining good adherence between the fibre waste pads and the carpet backing. As a result, the pads may have a tendency to become detached during subsequent handling or installation.

15 It has also been proposed to employ a foam cushioning layer instead of fibre pads in mouldable automobile carpet structures. Mouldable composite carpet structures of this type are disclosed, for example, in U.S. Patents 4,016,318; 4,078,100; 4,186,230; 4,230,755; and German OS 29 24 197.  
20 Typically, they contain both a foam layer and a mouldable thermoplastic polymer layer on the back of the carpet. The presence of the foam layer makes moulding of the carpet difficult, since the thermal insulating property of the foam interferes with the necessary heating and cooling  
25 of the mouldable thermoplastic layer during the moulding operation. Also, excessive heating may damage the foam layer. In these constructions, the foam pad extends over the entire rear surface of the carpet assembly, and no provision is made for providing the pads in selected areas  
30 only of the carpet or for variations in pad thickness, as is needed for many automotive body styles as noted earlier. The presence of the foam pad throughout the rear surface also restricts the shapes and contours which can be imparted to the carpet by moulding.

35 With the foregoing in mind, it is an object of the present invention to avoid or minimise one or more of the disadvantages associated with the existing known methods

of production of a moulded automotive carpet assembly.

5 In accordance with the present invention an improved  
moulded carpet assembly has foam padding provided only  
in localized preselected areas where needed. The present  
invention provides, in particular, a moulded foam-backed  
carpet assembly suitable for use in an automobile wherein  
the foam backing on said carpet is present only in localized  
preselected areas of the carpet assembly to reduce weight,  
provide better fit and conformity while providing the  
10 desired padding, cushioning and sound deadening where most  
needed, said carpet assembly comprising a carpet having a  
backing and pile yarns carried by the backing and extending  
from one face thereof to form a pile surface, said carpet  
having a predetermined nonplanar three dimensional contoured  
15 configuration for conforming to the predetermined contours  
of the floor of said automobile; a mouldable thermoplastic  
polymer layer covering the opposite face of said carpet  
backing and imparting mouldability to the carpet for  
maintaining the carpet in said nonplanar three dimensional  
20 contoured configuration; and at least one foam pad carried  
by said thermoplastic polymer layer and bonded thereto,  
said at least one pad extending over less than the entire  
surface of said thermoplastic polymer layer and providing  
desired cushioning and sound and thermal insulation only  
25 in preselected areas of the carpet.

The carpet assembly of the invention avoids the  
necessity of using precut fibre pads which must be  
properly placed and secured to the carpet backing, and  
instead provides foam pads which can be formed in situ  
30 at desired locations on the back of the moulded carpet  
assembly.

The moulded foam-backed automotive carpet assembly  
of the present invention comprises a carpet having a  
backing and pile yarns carried by the backing and  
35 extending from one face thereof to form a pile surface,  
said carpet having a predetermined nonplanar three  
dimensional contoured configuration for conforming to the

predetermined contours of an automobile; a mouldable thermoplastic polymer layer covering the opposite face of the carpet backing and imparting mouldability to the carpet for maintaining the carpet in this non-planar  
5 three dimensional contoured configuration; and at least one foam pad carried by the thermoplastic polymer layer and fusibly bonded thereto, this pad extending over less than the entire surface of the thermoplastic polymer layer and providing desired cushioning and sound and  
10 thermal insulation only in preselected areas of the carpet.

The foam pads are preferably formed so that they vary in thickness in certain areas so as to further contribute to a good fit and conform to irregularities in the floor. In typical constructions, the carpet assembly may include  
15 a plurality of pads at different areas on the carpet assembly, and these pads may differ in thickness and/or density in accordance with the requirements of the particular automobile body style.

In a further aspect the present invention provides  
20 a method of producing a moulded foam-backed carpet assembly suitable for use in an automobile which method comprises applying a layer of a mouldable thermoplastic polymer to the carpet backing of a carpet having pile yarns extending from the opposite side of said backing, heating the carpet  
25 to soften the thermoplastic layer and moulding the carpet into a predetermined nonplanar three dimensional contoured configuration; and forming in situ on the exposed surface of the thermoplastic layer at least one foam pad bonded to the thermoplastic layer and covering selected areas only  
30 of the carpet and extending over less than the entire surface of the thermoplastic polymer layer.

Further preferred features and advantages of the invention will appear from the following detailed description given by way of example of some preferred  
35 embodiments illustrated with reference to the accompanying drawings, in which:

0169627

Figure 1 is a perspective view showing a moulded carpet assembly in accordance with the present invention;

Figure 2 is a perspective view showing the underside thereof;

5        Figure 3 is an enlarged cross-sectional view of the carpet assembly taken substantially along the line 3-3 of Figure 1;

10        Figure 4 is a block schematic diagram illustrating the process for producing the moulded carpet assembly in accordance with the present invention;

Figure 5 is a somewhat schematic exploded cross-sectional side view showing a mould assembly which may be used for forming foam pads in accordance with the invention;

15        Figure 6 is a side view of the mould assembly of Figure 5 in its closed position; and

Figure 7 is an enlarged cross-sectional side view of the mould assembly of Figure 6.

20        Figure 1 shows a carpet assembly 10 having a non-planar three dimensional moulded configuration adapted to fit in the front seat compartment of an automobile and includes a raised medial portion 11 adapted to conform to the transmission hump, generally vertically extending side portions 12 adapted to fit beneath the door opening, and a front portion 13 adapted to fit along the inclined floor-board and vertical firewall areas of the automobile. Various openings or cut-outs are provided, as indicated at 14, to receive air conditioning equipment, the steering column, pedals and the like. It is to be understood that  
25        the particular three dimensional configuration illustrated is merely for purposes of illustration, and the actual configuration may vary quite significantly from that shown depending on the automobile body style.

30        The underside of the carpet assembly 10 is shown in Figure 2. As illustrated, foam pads 15a, 15b, 15c extend over selected portions of the carpet assembly. More specifically, it will be seen that the foam pads extend

over less than the entire rear surface of the carpet assembly and that the foam pads differ in thickness, not only from one pad to another but also vary in thickness within a given pad. In the embodiment illustrated, it  
5 will be seen that pad 15a located in the vertically extending firewall area 13 is relatively thick to provide added thermal and sound insulation in this area. Pad 15b in the angular inclined footrest area is of intermediate thickness. The pads 15c in the horizontal floor area  
10 have a thickness which tapers in the side portions 12 so as to fit snugly beneath the door moulding. Also the pads 15c are shown with a widthwise extending step thickness change in the form of a reduced thickness area indicated at 16, to conform to and receive a corresponding reinforcing  
15 rib on the automobile floor-board and provide a smooth finished surface to the installed carpet assembly.

Figure 3 shows the carpet assembly in greater detail. As illustrated, it includes a carpet 21, which may suitably be of tufted, woven, knitted, or nonwoven construction in  
20 accordance with known methods of carpet manufacture. The carpet 21 more specifically includes a backing 22 and pile yarns 23 which are secured to the backing 22 and extend therefrom to form a pile surface on the front of the carpet. The backing 22 is typically of a woven or nonwoven construction,  
25 depending upon the particular type of carpet construction. The pile yarns may be of any suitable composition, typically polyester or nylon. In order to more securely adhere and lock the pile yarns 23 into the backing 22, the carpet may include a suitable binder coating (not shown), as is  
30 conventional in the manufacture of tufted carpets.

On the rear surface of the carpet backing 22 there is provided a coating or layer 24 of a thermoplastic polymer composition. The thermoplastic polymer layer 24 is adhered firmly to the backing 22 and extends substantially  
35 over the entire surface thereof. The thermoplastic polymer layer 24 serves several functions. A primary function is

to impart stiffness and mouldability to the carpet so that the carpet can be moulded into a desired three dimensional contoured configuration conforming to the contours of the floor of the automobile, and to impart shape-retentive characteristics to the moulded carpet so that it will maintain this three dimensional configuration during subsequent assembly and installation in the automobile and throughout its useful life. Another important function of the thermoplastic layer 24 is to impart sound deadening properties so as to thereby make the interior of the automobile more quiet. To this end, the thermoplastic composition may contain substantial proportions of filler materials such as calcium carbonate, gypsum, barium sulphate, etc. The filler content may, for example, be as high as about 80% by weight. Various polymers or copolymers may be suitably employed as the thermoplastic polymer such as, for example, polymers or copolymers of ethylene with ethylenically unsaturated monomers; blends of such polymers and copolymers with other processing aids or adjuvants such as processing oils, plasticizers and the like; polyolefin polymers such as polyethylene or polypropylene; polyvinyl chloride; styrene-butadiene mixed polymers and mixtures of these materials with other thermoplastic polymers. Specific examples of filled thermoplastic compositions designed for use as a sound deadening backing layer on automotive carpets are disclosed in U.S. Patents 4,191,798, 4,242,395, 4,379,190, and 4,403,007. The thermoplastic polymer layer 24 may be applied to the back of the carpet by suitable methods such as extrusion coating, calendering, or lamination, for example.

The foam pads 15a, 15b, 15c are bonded to the thermoplastic polymer layer 24 and provide desired cushioning properties, as well as thermal and sound insulation to the carpet assembly 10. The pads 15 are formed of a foam material, preferably a polyurethane foam. As explained more fully hereinafter, the polyurethane



foam pads are formed in situ on preselected areas of the backing. This results in the pads being permanently and fusibly bonded to the thermoplastic foam layer without the necessity of additional adhesives. Optionally, the  
5 foam composition may be loaded with fillers, glass beads, fibres or the like in order to vary the weight and density properties of the foam for optimum acoustical and cushioning properties.

A preferred method of producing the moulded carpet  
10 assembly 10 is illustrated schematically in Figure 4. As shown, the thermoplastic backing composition is applied to the back of the carpet in a suitable manner, indicated at 25, such as by extrusion coating or calendering. The thus coated carpet is then subjected to a moulding operation  
15 where it is moulded into a desired predetermined configuration. Typically, the moulding operation includes heating a piece of the thermoplastic backed carpet to a temperature sufficiently high to soften the thermoplastic backing layer, as indicated at 26, and then placing the heated  
20 carpet between a pair of cooperating mould dies and applying pressure to the heated carpet within the mould dies in order to form it into the desired three dimensional configuration, as indicated at 27. After the carpet has cooled sufficiently to retain its shape, the mould dies  
25 are opened and the moulded carpet is removed from the moulds.

The thus moulded coated carpet is then subjected to a second moulding operation, indicated at 28, in which foam pads are formed in situ on preselected areas of the  
30 thermoplastic polymer back coating.

Preferably, a mould is provided which has a three dimensional configuration generally similar to that of the first mould which was used to shape the carpet. However, this mould includes recessed areas or wells of a size and  
35 depth which correspond to the foam pads to be formed. The foamable polyurethane composition is placed or injected in the wells, and the mould dies are brought together to

enclose the moulded carpet while the foamable composition foams, expands, and hardens to form foam pads in situ on preselected areas of the backing.

As illustrated more specifically in Figures 5 to 7, the apparatus for carrying out the foam pad moulding step includes a cooperating upper mould 51 and lower mould 52. The recessed areas or wells in the lower mould 52 are indicated at 53. The upper mould 51 is preferably provided with suction means 55 which serves to hold the moulded carpet in place on the upper mould until the mould halves are closed. A suitable amount of the foamable composition may be manually placed in the wells 53 prior to closing the mould halves. Alternatively, and as illustrated, injector nozzles, as indicated at 58 may be provided in association with each of the wells 53 for injecting a measured amount of the foamable composition into the well. In this instance, the mould halves may, be suitably closed prior to injection of the foamable composition.

The foamable composition expands to fill the wells 53 and hardens and cures to form resilient flexible foam pads of the desired shape and density fusibly bonded to the exposed thermoplastic backing layer. To facilitate release of the in situ moulded pads from the mould, the moulds may be coated with a suitable mould release composition prior to introduction of the foamable composition. Alternatively, a thin film may be draped over the mould and utilized as a release layer, with the film becoming bonded to the in situ formed pad.

By providing foamable compositions in different wells or in different areas of the same well it is possible to vary the density, flexibility, and other properties of the foam pad. The particular formulation of the foamable composition may be selected by those skilled in the art depending upon the particular physical properties (e.g., stiffness, resilience, hardness, density, sound deadening properties) desired in the final product. Two part

foamable polyurethane compositions have been suitably employed to form the form. For example, a suitable soft low density (3 to 5 pounds per cubic foot) polyurethane foam for use in this invention may be produced from a  
5 mixture of about 60 per cent of a polyol and 30 per cent isocyanate (preferably all MDI but suitably a MDI/TDI blend), with about 10 per cent auxiliary chemicals such as fluorocarbons, water, catalysts, surfactants and  
10 fillers (TDI stands for toluene diisocyanate and MDI is methylene diphenyl diisocyanate).

CLAIMS

1. A moulded foam-backed carpet assembly (10) suitable for use in an automobile wherein the foam backing on said carpet is present only in localized preselected areas of the carpet assembly (10) to reduce weight, provide better fit and conformity while providing the desired padding, cushioning and sound deadening where most needed, said carpet assembly comprising a carpet (10) having a backing (22) and pile yarns (23) carried by the backing (22) and extending from one face thereof to form a pile surface, said carpet (10) having a predetermined nonplanar three dimensional contoured configuration for conforming to the predetermined contours of the floor of said automobile; a mouldable thermoplastic polymer layer (24) covering the opposite face of said carpet backing (22) and imparting mouldability to the carpet (10) for maintaining the carpet (10) in said nonplanar three dimensional contoured configuration; and at least one foam pad (15a,b,c) carried by said thermoplastic polymer layer (24) and bonded thereto, said at least one pad (15a,b,c) extending over less than the entire surface of said thermoplastic polymer layer (24) and providing desired cushioning and sound and thermal insulation only in preselected areas of the carpet (10).
2. A carpet assembly according to Claim 1 wherein said at least one foam pad (15c) has different thickness at different locations within said preselected areas.
3. A carpet assembly according to Claim 2 wherein the variation in thickness of said at least one foam pad (15c) includes a step thickness change (16).
4. A carpet assembly according to any one of Claims 1 to 3 which includes a plurality of said foam pads (15a,b,c), and wherein at least one of the foam pads (15a) differs in thickness from the other foam pads (15b, 15c).

5. A carpet assembly according to any one of Claims 1 to 4 which includes a plurality of said foam pads (15a, b, c), and wherein at least one of the foam pads (15a, b, c) differs in density from the other foam pads (15a, b, c).
- 5 6. A carpet assembly according to any one of Claims 1 to 5 wherein said at least one foam pad (15a, b, c) is fusibly bonded to said thermoplastic polymer layer (24).
7. A carpet assembly according to any one of Claims 1 to 6 wherein said at least one foam pad (15a, b, c) is  
10 substantially thicker than said thermoplastic polymer layer (24).
8. A carpet assembly according to any one of Claims 1 to 7 wherein said thermoplastic polymer layer (24) contains a filler material for imparting a high density and sound  
15 deadening properties to said layer (24).
9. A method of producing a moulded foam-backed carpet assembly suitable for use in an automobile which method comprises applying a layer (24) of a mouldable thermoplastic polymer to the carpet backing (22) of a carpet (10) having  
20 pile yarns (23) extending from the opposite side of said backing (22), heating the carpet (10) to soften the thermoplastic layer (24) and moulding the carpet (10) into a predetermined nonplanar three dimensional contoured configuration; and forming in situ on the exposed surface  
25 of the thermoplastic layer (24) at least one foam pad (15a, b, c) bonded to the thermoplastic layer (24) and covering selected areas only of the carpet (10) and extending over less than the entire surface of the thermoplastic polymer layer (24).
- 30 10. A method according to Claim 9 wherein the step of forming in situ at least one foam pad (15a, b, c) comprises depositing a foamable polymer composition in a confined space (53) on the back (24) of the moulded carpet (10), said confined space (53) having predetermined dimensions  
35 corresponding to the desired shape of the pad (15a, b, c) and allowing the composition to foam, expand and harden.





in said confined space to form a pad (15a,b,c) therein fusibly bonded to the thermoplastic layer (24).

11. A method according to Claim 9 or Claim 10 wherein the foamable polymer composition is a polyurethane.




5 12. A method according to any one of Claims 9 to 11 wherein the heated carpet is moulded into a predetermined nonplanar three dimensional conoured configuration within a first mould (51), removed from said first mould (51) and placed in a second mould (52) having a three dimensional  
10 contour corresponding substantially to that of the moulded three dimensional carpet (10) and including cavities (53) in preselected areas defining said confined spaces introducing into said cavities (53) a foamable polymer composition and foaming said polymer composition so as to  
15 form in situ on the back of the moulded carpet said foam pads (15a,b,c), and removing the thus formed foam-backed carpet assembly from said second mould (52).

13. A method according to Claim 12 in which at least two  
20 different foamable polymer compositions are introduced into said cavities (53) so as to produce foam pads (15a,b,c) of differing physical characteristics.

1/2

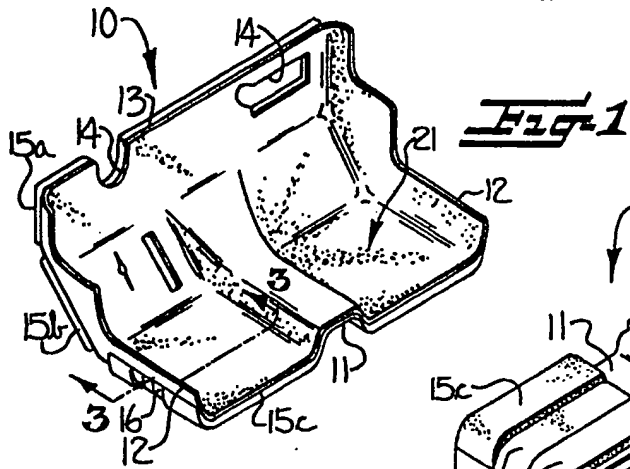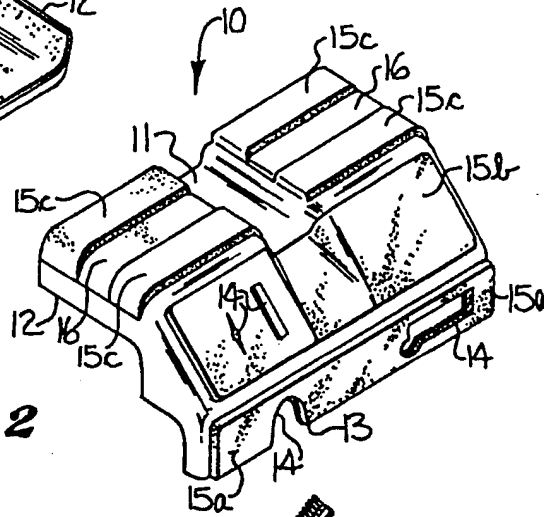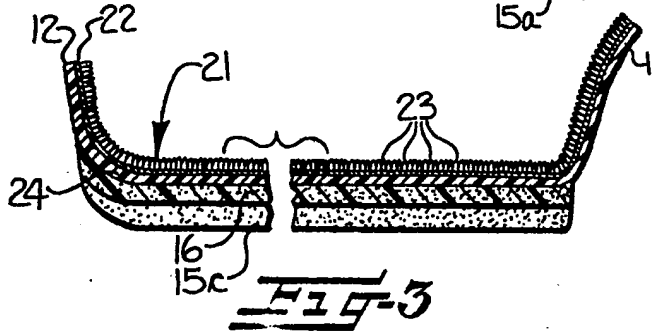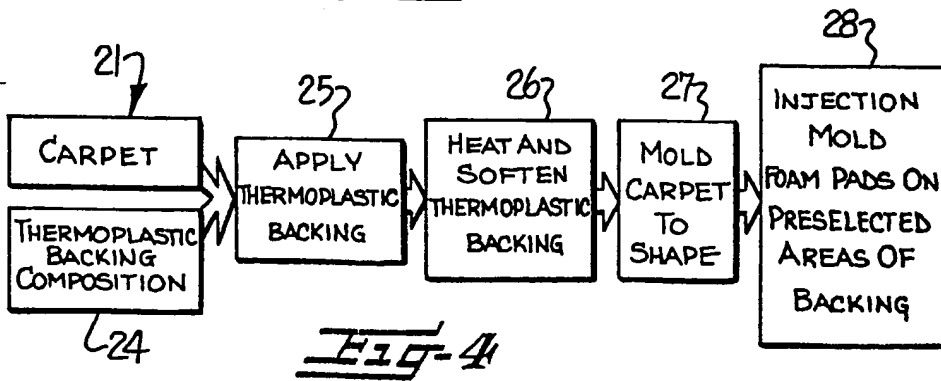Fig. 1Fig. 2Fig. 3Fig. 4

2/2

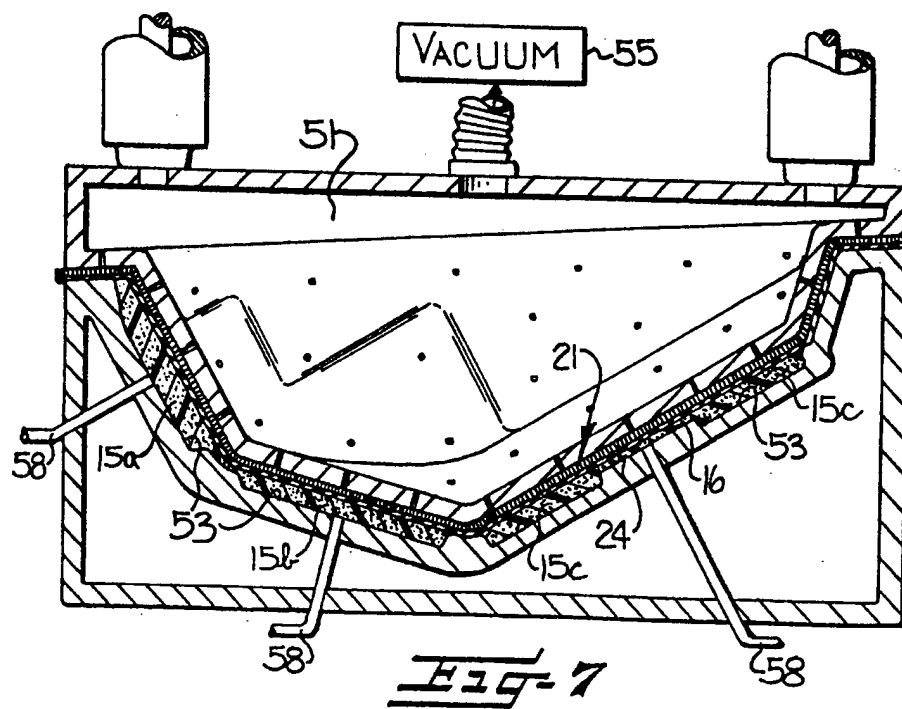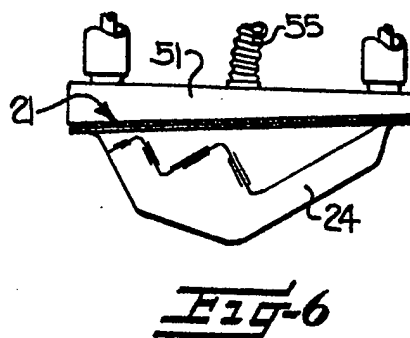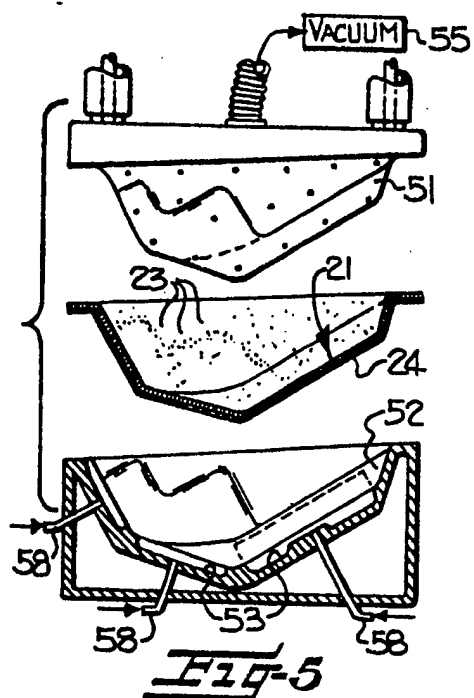



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**Trim component with acoustic damping backing - has uniform thickness carpet surface, with different local backing thicknesses**

**Patent number:** DE4038025  
**Publication date:** 1992-06-11  
**Inventor:** ROEDING HUBERT DIPL ING (DE); EXNER-EWARTEN  
DETLEV ING GRAD (DE)  
**Applicant:** SCHAEFFLER TEPPICHBODEN GMBH (DE)  
**Classification:**  
**- international:** A47G27/02; B32B31/00; B60R13/08; D06N7/00;  
B29C39/10; B29C45/14; B32B5/02; B32B7/02;  
B32B27/12  
**- european:** B29C45/14D; B29C45/14Q; B29C70/78; D06N7/00B6  
**Application number:** DE19904038025 19901129  
**Priority number(s):** DE19904038025 19901129

**Report a data error here**

**Abstract of DE4038025**

Trim item, partic. a floor covering for a vehicle, has a covering, e.g. carpet, and acoustic damping backing. The backing is moulded with different local thicknesses and is rigidly attached to the covering. The backing is made of PUR, EPDM and/or EVA and/or bitumen and can contain recycled material. USE/ADVANTAGE - The thickness variations required for optimum acoustic damping are incorporated in the heavy backing with a uniform thickness carpet cover.

---

Data supplied from the **esp@cenet** database - Worldwide



19 BUNDESREPUBLIK  
DEUTSCHLAND



DEUTSCHES  
PATENTAMT

12 Offenlegungsschrift  
10 DE 40 38 025 A 1

21 Aktenzeichen: P 40 38 025.4  
22 Anmeldetag: 29. 11. 90  
43 Offenlegungstag: 11. 6. 92

51 Int. Cl.<sup>5</sup>:  
**B 32 B 7/02**  
B 32 B 31/00  
B 32 B 5/02  
B 32 B 27/12  
B 60 R 13/08  
D 06 N 7/00  
B 29 C 45/14  
B 29 C 39/10  
A 47 G 27/02  
// B32B 27/40,27/32,  
25/14,11/10,D06N  
3/00

DE 40 38 025 A 1

71 Anmelder:  
Schaeffler Teppichboden GmbH, 8600 Bamberg, DE  
74 Vertreter:  
Gaiser, H., Dipl.-Ing., Pat.-Anw., 8500 Nürnberg

72 Erfinder:  
Röding, Hubert, Dipl.-Ing. (FH), 8612 Ebrach, DE;  
Exner-Ewarten, Detlev, Ing.(grad), 8602  
Pommersfelden, DE

Prüfungsantrag gem. § 44 PatG ist gestellt

54 Verfahren zur Herstellung eines Auskleidungsteils und Auskleidungsteil

57 Bei einem Verfahren zur Herstellung eines Auskleidungsteils, insbesondere für ein Kraftfahrzeug, wird an einer Deckschicht aus einem Deckteil, beispielsweise Teppich, rückseitig eine akustisch wirksame Schwerschicht angebracht. Um die Gestaltung der Schwerschicht einfach anpaßbar zu machen, wird sie als Schwerschichtmasse in einem Formwerkzeug an das Deckteil angegossen oder angespritzt. Die Schwerschichtmasse wird in unterschiedlichen Bereichen des Deckteils in nach den örtlich unterschiedlichen akustischen Erfordernissen unterschiedliche Dicken bzw. Flächengewichten angegossen oder angespritzt. Danach wird die Schwerschichtmasse formstabil.

DE 40 38 025 A 1

**Family list**

**1** family member for:

**DE4038025**

Derived from 1 application.

- 1 Trim component with acoustic damping backing - has uniform thickness carpet surface, with different local backing thicknesses**  
Publication info: **DE4038025 A1** - 1992-06-11

---

Data supplied from the **esp@cenet** database - Worldwide